


“COR SAR” LIGHT PORTABLE ANTITANK SYSTEM

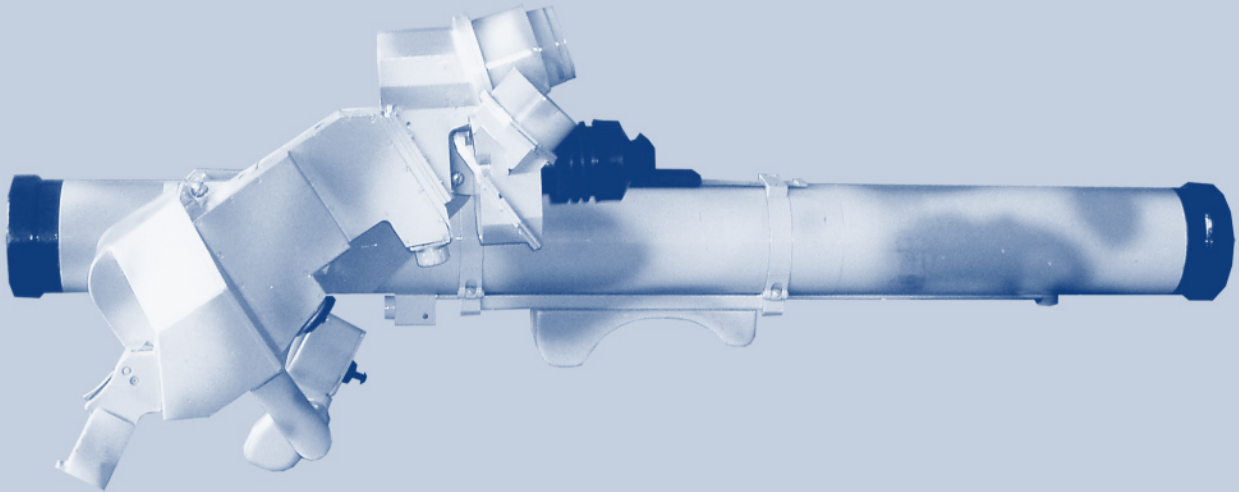

PURPOSE

Light portable antitank system is intended to engage stationary and moving modern armoured targets and other objects with armour combined, incomplete or monolithic including ERA, and also to engage pinpoint targets like weapon emplacements, tank in a trench, lightly armored objects and helicopters.

PERFORMANCES

Maximum range, m	2000
Flight time at maximum range, sec	10
Guidance system	semiautomatic by laser beam
Warhead: -type	tandem hollow-charge
-armor penetration behind ERA, mm	not less than 550
System weight, kg	17
Including: -missile in container	12,5
Overall dimensions, mm:	
-missile caliber	100
-container length	1200
-container outer diameter	110
Operating temperature range, °C	from minus 40 till +60